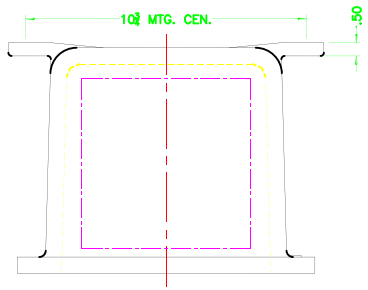



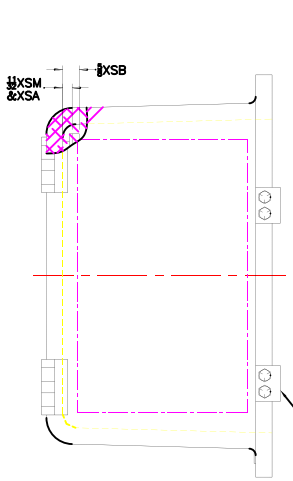

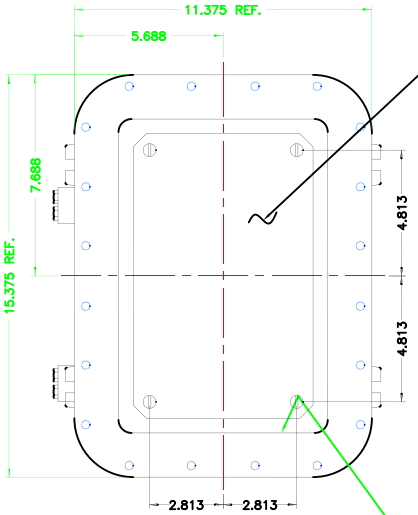

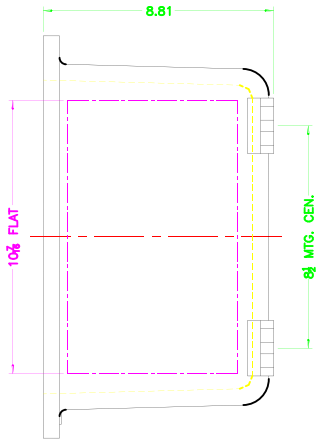

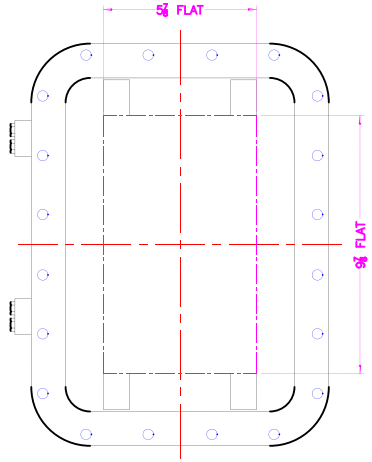

OPTIONAL XHB-2 HINGE

EXISTING GRD. SCREW

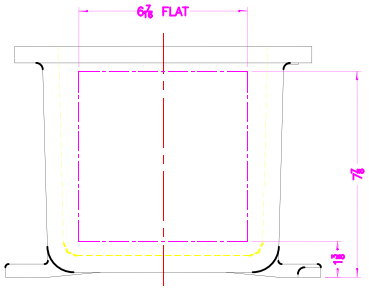

XCE 0812 COVER

COVER DRILLING ALLOWABLE IN XCE ONLY

NOTES:

1. MINIMUM SPACING FROM CENTER OF OPERATOR TO NEAREST FLAT IS 1 1/16.
2. MINIMUM SPACING BETWEEN ¾–14 NPSM OPERATOR CENTERS IS 2½ FOR THIS ENCLOSURE.
3. MAXIMUM NUMBER OF OPERATORS IS 8.
4. DIMENSION FROM CENTER LINES OF COVER FOR OPERATORS.
5. DIMENSION FROM CENTER LINE AND BACK OF MTG. LUG FOR CONDUIT.
6. FOR MTG. ENCLOSURE USE 3/8 BOLT.

REV	REVISION	BY	ECN	DATE

DO NOT SCALE DRAWING
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
CAST TOLERANCES ON DIMENSIONS NOT OTHERWISE SPECIFIED
+ 1/8" SURFACE
FILLET R .125
CORNER R1/8
DRAFT 1°
FINISH 63
ANGLES ±1°
MACHINE TOLERANCES ON DIMENSIONS NOT OTHERWISE SPECIFIED
± .005 .XXX ± .010"
FILLET R .062 .XXX ± .010"
TAPPED HOLES .250"–.010" R, or 40°
ANGLES ± 0–30'
DRILLED HOLES
COUNTERBORE SPECIFIED
BOLT CLEARANCE HOLES
SCREW CLEARANCE HOLES
NPSM C-27-1.0

ADALET
A SCOTT FETZER COMPANY
Enclosure Systems Cable Accessories

NOTICE TO PERSONS RECEIVING THIS DRAWING
THIS DRAWING AND THE INFORMATION CONTAINED HEREIN ARE THE EXCLUSIVE PROPERTY OF ADALET, AND SHALL NOT BE REPRODUCED, COPIED OR USED IN WHOLE OR IN PART FOR ANY PURPOSE WITHOUT THE WRITTEN PERMISSION OF ADALET. THIS DRAWING IS LOANED SUBJECT TO THE AGREEMENT THAT NO RIGHTS SHALL BE ACQUIRED BY REASON OF THE ACCEPTANCE OR USE THEREOF, AND THAT NEITHER IT NOR THE INFORMATION CONTAINED THEREIN SHALL BE USED IN WHOLE OR IN PART FOR ANY PURPOSE DETRIMENTAL TO THE INTERESTS OF ADALET OR ITS SUBSIDIARIES. ANY REPRODUCTION OF THIS DRAWING MUST INCLUDE THIS NOTICE.

MATERIAL
FINISH TUMBLAST
CAT NO XCE/XJF 081208

TITLE MODIFIED XCE/XJF 081208 ENCLOSURE FOR

DRAWN BY	DDH	DATE	6–13–01
ENG APPROVAL		PLOT SCALE	1=2.5
MFG APPROVAL		DRG SIZE	D
DRG NO		SHT	1OF1
		REV	