REV	REVISION	BY	ECN	DATE

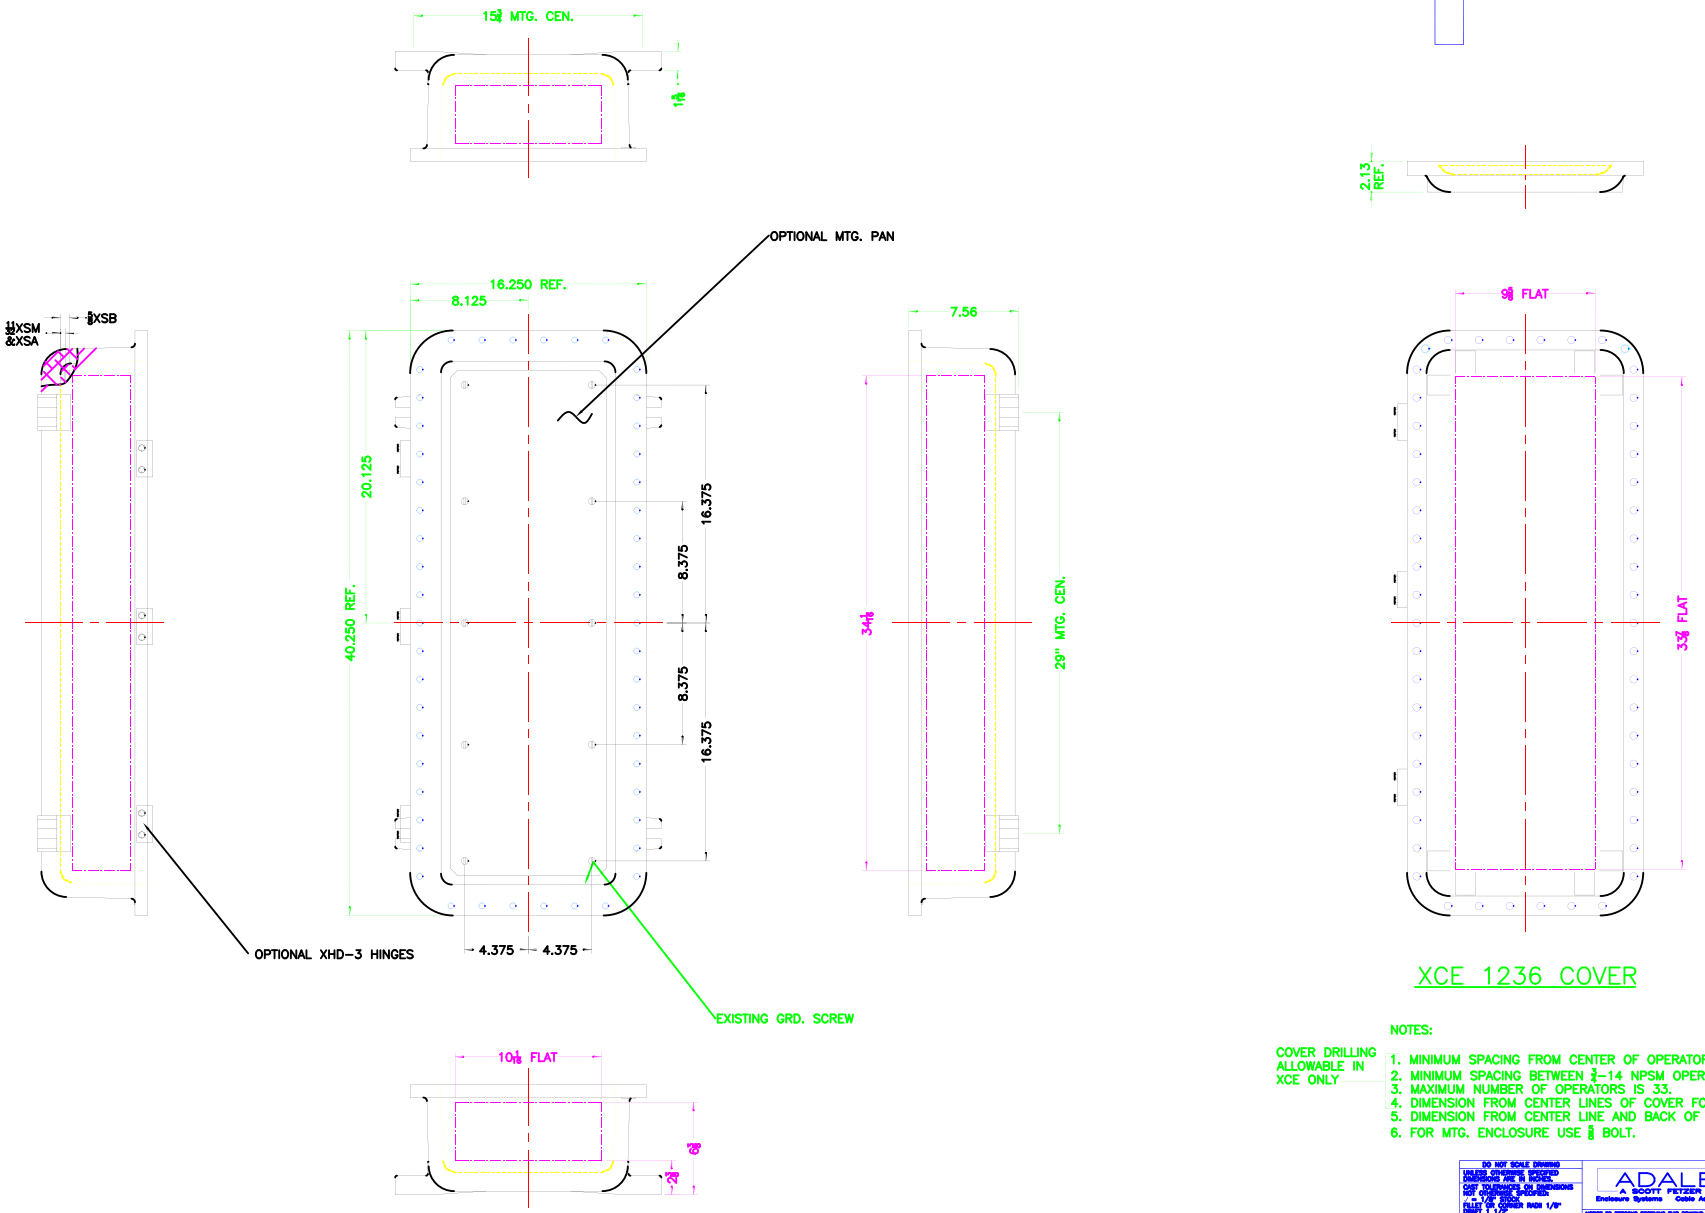

XCE 1236 COVER

NOTES:

COVER DRILLING ALLOWABLE IN XCE ONLY

1. MINIMUM SPACING FROM CENTER OF OPERATOR TO NEAREST FLAT IS 1 1/16.
2. MINIMUM SPACING BETWEEN 3/4-14 NPSM OPERATOR CENTERS IS 3 FOR THIS ENCLOSURE.
3. MAXIMUM NUMBER OF OPERATORS IS 33.
4. DIMENSION FROM CENTER LINES OF COVER FOR OPERATORS.
5. DIMENSION FROM CENTER LINE AND BACK OF MTG. LUG FOR CONDUIT.
6. FOR MTG. ENCLOSURE USE 3/8 BOLT.

DO NOT SCALE DRAWING
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
CRIT TOLERANCE ON DIMENSIONS OF COMPONENT PARTS ±.1/8" EXCEPT
FILLET OR CORNER RADII 1/8"
DRAFT 1 1/2
FINIS 61/2
ANGLES ± 1°
MACHINE TOLERANCES ON DWGS. SCALE NOT DIMENSIONS SPECIFIED.
.X = ±.1
.XX = ±.03 .XXX ± .010"
FILLET .XXX .XXX
FINIS MACH .250"-.010" R. or 45°
ANGLES ± 0-30'
DRILL FOR THREADED HOLES
HOLE TOLERANCE
HOLE DIA. ±.1
DEPTH ±.1

ADALET
A SCOTT FETZER COMPANY
Enclosure Systems Cable Accessories

NOTICE TO PERSONS RECEIVING THIS DRAWING
THIS DRAWING CONTAINS PROPRIETARY INFORMATION OF THE ADALET DIVISION OF THE SCOTT FETZER COMPANY. IT IS LOANED FOR REFERENCE PURPOSES ONLY AND MAY NOT BE REPRODUCED OR COPIED, IN WHOLE OR IN PART, NOR MAY IT BE DISCLOSED OR LOANED TO ANYONE WITHOUT WRITTEN CONSENT OF THE ADALET DIVISION OF THE SCOTT FETZER COMPANY. THIS NOTICE MUST BE NOT DEFACED.

MATERIAL
FINISH: TUMBLAST
CAT NO: XCE/XJF 123606

TITLE: MODIFIED XCE/XJF 123606 ENCLOSURE FOR

DRAWN BY	DDH	DATE	11-13-01
ENG APPROVAL		PLOT SCALE	1=4.5
MFG APPROVAL		DWG SIZE	D
DWG NO		SHT	1OF1
		REV	