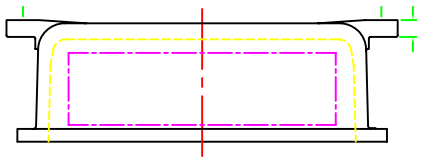



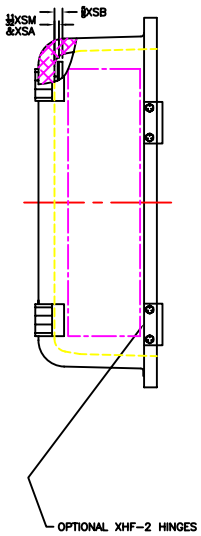

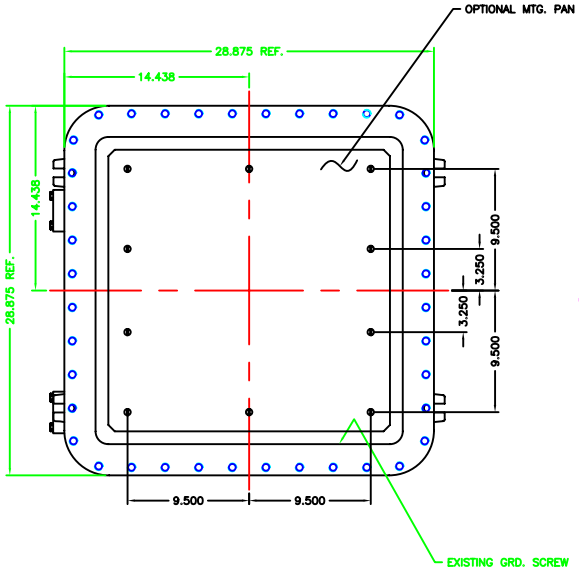

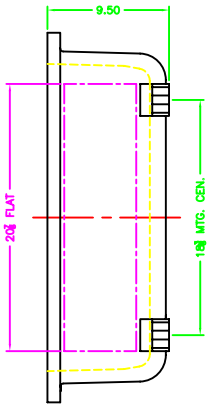

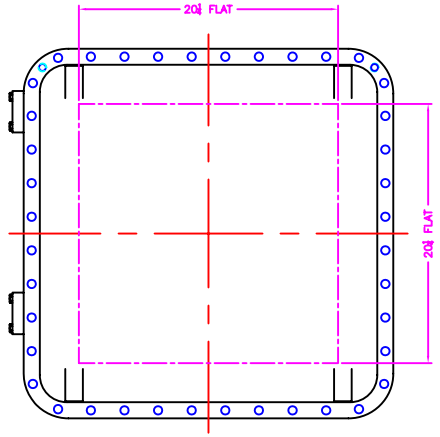

XCE 2424 COVER

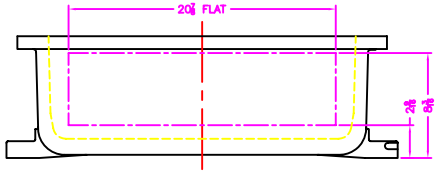

COVER DRILLING ALLOWABLE IN XCE ONLY

NOTES:

1. MINIMUM SPACING FROM CENTER OF OPERATOR TO NEAREST FLAT IS 1⅛.
2. MINIMUM SPACING BETWEEN ¾–14 NPSM OPERATOR CENTERS IS 3½ FOR THIS ENCLOSURE.
3. MAXIMUM NUMBER OF OPERATORS IS 36.
4. DIMENSION FROM CENTER LINES OF COVER FOR OPERATORS.
5. DIMENSION FROM CENTER LINE AND BACK OF MTG. LUG FOR CONDUIT.
6. FOR MTG. ENCLOSURE USE ⅜ BOLT.

MODIFIED XCE/XJF 242408 ENCLOSURE FOR