


**XCE 2430 COVER**

**NOTES:**

- COVER DRILLING ALLOWABLE IN XCE ONLY
1. MINIMUM SPACING FROM CENTER OF OPERATOR TO NEAREST FLAT IS 1 1/8".
  2. MINIMUM SPACING BETWEEN 1/4"-14 NPSM OPERATOR CENTERS IS 3 1/2" FOR THIS ENCLOSURE.
  3. MAXIMUM NUMBER OF OPERATORS IS 42.
  4. DIMENSION FROM CENTER LINES OF COVER FOR OPERATORS.
  5. DIMENSION FROM CENTER LINE AND BACK OF MTG. LUG FOR CONDUIT.
  6. FOR MTG. ENCLOSURE USE 3/8" BOLT.

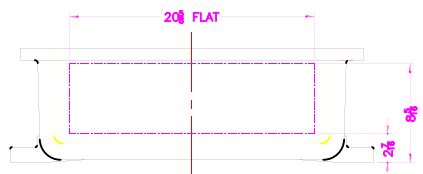

DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES UNLESS OTHERWISE SPECIFIED: FRACTIONS: ±.005 DECIMALS: ±.010 DIMENSIONS: ±.010 HOLE LOCATIONS: ±.010 HOLE DIAMETERS: ±.005 HOLE SPACINGS: ±.010 HOLE DEPTHS: ±.010 HOLE DRILLING: ±.010 HOLE FINISH: ±.010 HOLE TOLERANCES: ±.010 HOLE DRILLING: ±.010 HOLE FINISH: ±.010 HOLE TOLERANCES: ±.010	<p><b>ADALET</b> A SCOTT PETERSON COMPANY Business Systems Cable Accessories</p> <p>DATE TO BE REVIEWED: 2-13-02 DRAWN BY: DDH DATE APPROVAL: 2-13-02 CHECKED BY: DDH DATE APPROVAL: 2-13-02 DESIGNED BY: DDH DATE APPROVAL: 2-13-02 PROJECT: XCE 2430 SCALE: 1=5.5 SHEET: 1 OF 1 REV: D</p> <p>SEE NOTES TUMBLAST XCE/XIF 243008</p>	<p>FILE: MODIFIED XCE/XIF 243008 ENCLOSURE FOR</p> <p>DATE: 2-13-02 SCALE: 1=5.5 SHEET: 1 OF 1 REV: D</p> <p>10F1</p>
--	---	---